



2081 Hwy 188  
 Aransas Pass, TX 78336  
**Office:** 361-758-3030  
**Sales:** 361-739-4853  
**Fax:** 361-758-4631  
[www.TexasMetalBuildings.com](http://www.TexasMetalBuildings.com)

Prices are subject change without notice.

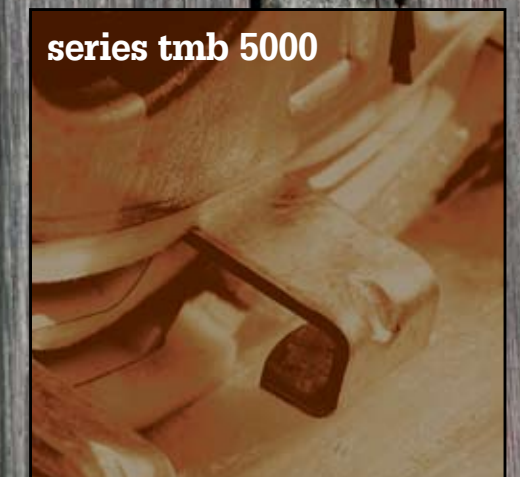

## 2007 Door Brochure

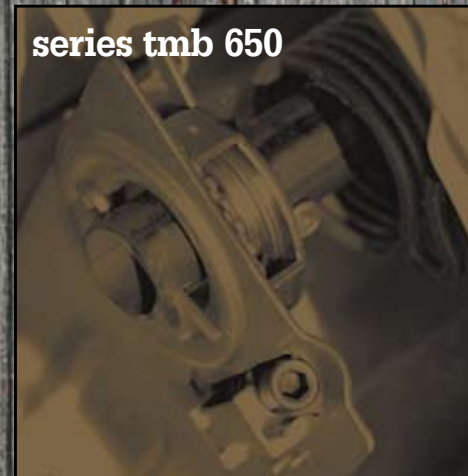

# Commercial & Industrial Roll-up Doors



## Series TMB 650

### GENERAL DESCRIPTION

- The 650 is the premium door for easy operation & maintenance
- The door features shielded steel radial bearings on both support brackets
- The tension bracket allows easy, quickly, & safe tension adjustments
- With unlimited tensioning positions, the 650 door can be adjusted to just the right amount of tension & avoid costly service calls
- Rain lip note: Exterior door installation requires a 1-1/2" deep rain lip in the concrete slab, extending a minimum of 3-1/2" from the interior jamb face

### SPECIFICATIONS

**Curtain:** 26 ga. Grade E hard steel, 5/8" deep rib corrugation, 20 standard colors - special colors on request, interior wash coat over primer, Weather X system (great color/gloss retention) endures abuse of fabrication, transit, & construction, 25-year film warranty/chalk & fade, stainless latch, 2 cylinder steel padlocks or cast zinc Apex latch. Latches use double locks & 7/16" shackles

**Bottom Bar** (easy-to-replace vinyl weather seal): 6063-T6 aluminum extrusion, 1-1/2" x 1-1/2" galvanized angles provide stability & security

**Axle Assembly:** 14 ga. 1-5/16" steel axle, torsion springs, 18 ga. 9-1/2" drums, fully accessible springs for inspection

**Guides:** 18 ga. galvanized steel guides, pre-punched holes for anchors, slide latch, & bracket attachment, polyethylene guide strips provide easy, quiet operation, pre-punched holes for head stop attachment

**Hardware:** 12 ga. stops, 14 ga. Galvanized handles, 12 ga. tension bracket, shielded radial bearings, worm gear adjustment, left side 12 ga. bearing bracket

**Options:** Tension bracket w/top & side draft stop

Door Width	Door Opening Height Up To					
	Hand Operated					
	6' 8"	7' 0"	7' 4"	8' 0"	9' 0"	10' 0"
3' 0"	\$143	\$146	\$159	\$157	-	-
3' 4"	\$148	\$151	\$156	\$162	-	-
3' 6"	\$151	\$153	\$159	\$165	-	-
3' 8"	\$153	\$155	\$161	\$167	-	-
4' 0"	\$157	\$160	\$165	\$172	-	-
5' 0"	\$169	\$174	\$180	\$188	-	-
5' 6"	\$172	\$179	\$186	\$199	-	-
6' 0"	\$182	\$188	\$195	\$204	-	-
7' 0"	\$194	\$202	\$210	\$218	-	-
8' 0"	\$212	\$223	\$231	\$241	-	-
8' 8"	\$222	\$226	\$235	\$248	-	-
9' 0"	\$230	\$234	\$250	\$261	\$280	\$294
10' 0"	-	\$260	-	\$274	\$303	\$333

Ideal for mini storage applications.



## Series TMB 2000

### GENERAL OVERVIEW

- Designed for frequent usage requirements.
- Standard duty applications for frequent usage including warehousing, freight terminal & industrial warehouse.
- Utilizes 12" drums
- Limited Maximum size of 12' x 18'

### SPECIFICATIONS

**Curtain:** 26 ga. Grade E steel, poly fiber filament wear strips, siliconized polyester paint over primer

**Bottom Bar:** 6063-T6 aluminum & 2" x 1-1/2" steel angle, bulb type astragal

**Guides:** 14 ga. Galvanized steel, polyethylene wear strips


**Axle Assembly:** 16 ga. Galvanized drums w/bearings. 1-5/16" O.D. tubing

**Locks:** 10 ga. steel slide bolt lock (1 pair)

Door Width	Door Opening Height Up To						
	Hand Operated			Reduced Drive Chain Hoist			
	8' 0"	9' 0"	10' 0"	12' 0"	14' 0"	16' 0"	18' 0"
8' 0"	\$498	\$518	\$540	\$642	\$701	\$774	\$852
9' 0"	\$530	\$552	\$577	\$692	\$728	\$817	\$937
10' 0"	\$545	\$571	\$614	\$734	\$789	\$925	\$1021
12' 0"	\$642	\$656	\$705	\$786	\$870	\$930	\$1190



SERIES TMB 2000 Door Engagement Detail

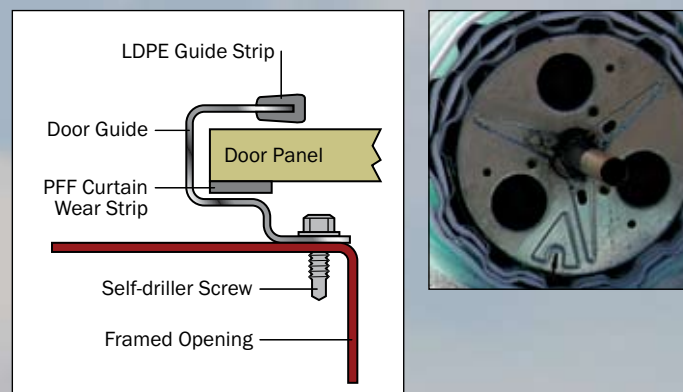

## Series TMB 2500

### GENERAL DESCRIPTION

- Designed for frequent usage requirements.
- Heavy duty applications for frequent usage including warehousing, freight terminal & industrial warehouse.
- Utilizes 12" drums
- Maximum size of 12' x 18'

### SPECIFICATIONS

**Curtain:** 26 ga. Grade E steel, poly fiber filament wear strips, siliconized polyester paint over primer

**Bottom Bar:** 6063-T6 aluminum & 2" x 1-1/2" steel angle, bulb type astragal

**Guides:** 3" deep heavy duty 12 ga. Galvanized steel, polyethylene wear strips


**Axle Assembly:** 16 ga. Galvanized drums w/bearings, 1-5/16" O.D. tubing

**Locks:** 10 ga. steel slide bolt lock (1 pair)

Door Width	Door Opening Height Up To						
	Hand Operated			Reduced Drive Chain Hoist			
	8' 0"	9' 0"	10' 0"	12' 0"	14' 0"	16' 0"	18' 0"
8' 0"	\$614	\$649	\$686	\$817	\$903	\$1006	\$1102
9' 0"	\$648	\$683	\$723	\$867	\$933	\$1049	\$1165
10' 0"	\$662	\$702	\$759	\$908	\$992	\$1159	\$1306
12' 0"	\$759	\$787	\$850	\$961	\$1072	\$1162	\$1325
14' 0"	\$781	\$853	\$924	\$1047	\$1134	\$1253	\$1369
16' 0"	\$834	\$918	\$1006	\$1111	\$1214	\$1327	\$1443
18' 0"	\$972	\$1071	\$1171	\$1371	\$1571	\$1769	\$1969



SERIES TMB 2500 Door Engagement Detail

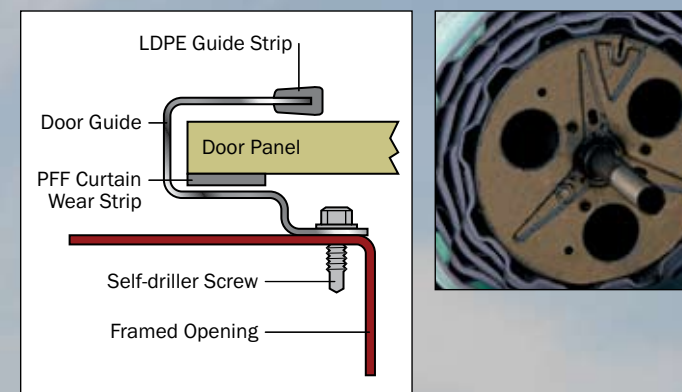

## Series TMB 5000

### GENERAL DESCRIPTION

- Designed for high wind usage requirements.
- Super duty applications for frequent usage.
- Deep engagement guides & wind-locks for better performance.
- Utilizes 12" drums
- Maximum size of 20' x 18'

### SPECIFICATIONS

**Curtain:** 26 ga. Grade E steel, poly fiber filament wear strips, siliconized polyester paint over primer

**Bottom Bar:** 6063-T6 aluminum & 2" x 1-1/2" steel angle, bulb type astragal

**Guides:** H.D. 12 ga. Galvanized with windlock bar, polyethylene wear strips

**Axle Assembly:** 16 ga. Galvanized drums w/bearings, 1-5/16" O.D. tubing

**Locks:** 10 ga. steel slide bolt lock (1 pair)

Door Width	Door Opening Height Up To						
	4:1 Reduced Drive Chain Hoist				8:1 Reduced Drive Chain Hoist		
	8' 0"	9' 0"	10' 0"	12' 0"	14' 0"	16' 0"	18' 0"
8' 0"	\$852	\$909	\$949	\$1046	\$1161	\$1240	\$1319
9' 0"	\$900	\$936	\$1002	\$1117	\$1214	\$1319	\$1425
10' 0"	\$930	\$984	\$1037	\$1152	\$1266	\$1363	\$1461
12' 0"	\$984	\$1042	\$1099	\$1222	\$1355	\$1566	\$1600
14' 0"	\$1055	\$1125	\$1196	\$1319	\$1478	\$1583	\$1688
16' 0"	\$1143	\$1214	\$1284	\$1443	\$1609	\$1732	\$1856
**18' 0"	\$1231	\$1302	\$1372	\$1547	\$1680	\$1874	\$2068
**20' 0"	\$1388	\$1478	\$1566	\$1741	\$1944	\$2094	\$2244

Note: Florida approved wind rated to 140 mph.

\*\* Indicates no certification available.



SERIES TMB 5000 Door Engagement Detail

