

Quality Pre-engineered Metal Buildings

Office: 361-758-3030

Sales: 361-739-4853

Fax: 361-758-4631

www.TexasMetalBuildings.com

Prices are subject to change without notice.



Door Brochure

series tmb 650



series tmb 2000



series tmb 2500



series tmb 5000



Commercial & Industrial Roll-up Doors



Series TMB 650

GENERAL DESCRIPTION

- The 650 is the premium door for easy operation & maintenance
- The door features shielded steel radial bearings on both support brackets
- The tension bracket allows easy, quickly, & safe tension adjustments
- With unlimited tensioning positions, the 650 door can be adjusted to just the right amount of tension & avoid costly service calls
- Rain lip note: Exterior door installation requires a 1-1/2" deep rain lip in the concrete slab, extending a minimum of 3-1/2" from the interior jamb face

SPECIFICATIONS

Curtain: 26 ga. Grade E hard steel, 5/8" deep rib corrugation, 20 standard colors - special colors on request, interior wash coat over primer, Weather X system (great color/gloss retention) endures abuse of fabrication, transit, & construction, 25-year film warranty/chalk & fade, stainless latch, 2 cylinder steel padlocks or cast zinc Apex latch. Latches use double locks & 7/16" shackles

Bottom Bar (easy-to-replace vinyl weather seal): 6063-T6 aluminum extrusion, 1-1/2" x 1-1/2" galvanized angles provide stability & security

Axle Assembly: 14 ga. 1-5/16" steel axle, torsion springs, 18 ga. 9-1/2" drums, fully accessible springs for inspection

Guides: 18 ga. galvanized steel guides, pre-punched holes for anchors, slide latch, & bracket attachment, polyethylene guide strips provide easy, quiet operation, pre-punched holes for head stop attachment

Hardware: 12 ga. stops, 14 ga. Galvanized handles, 12 ga. tension bracket, shielded radial bearings, worm gear adjustment, left side 12 ga. bearing bracket

Options: Tension bracket w/top & side draft stop

Door Width	Door Opening Height Up To					
	Hand Operated					
	6' 8"	7' 0"	7' 4"	8' 0"	9' 0"	10' 0"
3' 0"	\$165	\$195	\$205	\$210	-	-
3' 4"	\$198	\$205	\$210	\$220	-	-
3' 6"	\$205	\$210	\$215	\$225	-	-
3' 8"	\$208	\$215	\$220	\$230	-	-
4' 0"	\$210	\$220	\$225	\$235	-	-
5' 0"	\$225	\$230	\$240	\$250	-	-
5' 6"	\$230	\$240	\$250	\$265	-	-
6' 0"	\$245	\$250	\$260	\$275	-	-
7' 0"	\$260	\$270	\$280	\$290	-	-
8' 0"	\$285	\$295	\$310	\$325	-	-
8' 8"	\$300	\$305	\$315	\$335	-	-
9' 0"	\$310	\$315	\$335	\$350	\$375	\$395
10' 0"	-	\$350	-	\$370	\$410	\$450

Ideal for mini storage applications.



Series TMB 2000

GENERAL DESCRIPTION

- Designed for frequent usage requirements.
- Standard duty applications for frequent usage including warehousing, freight terminal & industrial warehouse.
- Utilizes 12" drums
- Limited Maximum size of 12' x 18'

SPECIFICATIONS

Curtain: 26 ga. Grade E steel, poly fiber filament wear strips, siliconized polyester paint over primer


Bottom Bar: 6063-T6 aluminum & 2" x 1-1/2" steel angle, bulb type astragal

Guides: 14 ga. Galvanized steel, polyethylene wear strips


Axle Assembly: 16 ga. Galvanized drums w/bearings. 1-5/16" O.D. tubing

Locks: 10 ga. slide bolt lock (1 pair)

Door Width	Door Opening Height Up To						
	Hand Operated			Reduced Drive Chain Hoist			
	8' 0"	9' 0"	10' 0"	12' 0"	14' 0"	16' 0"	18' 0"
8' 0"	\$560	\$585	\$610	\$725	\$790	\$870	\$960
9' 0"	\$600	\$620	\$650	\$780	\$820	\$925	\$1,060
10' 0"	\$615	\$645	\$690	\$825	\$890	\$1,040	\$1,150
12' 0"	\$725	\$740	\$795	\$885	\$980	\$1,060	\$1,340

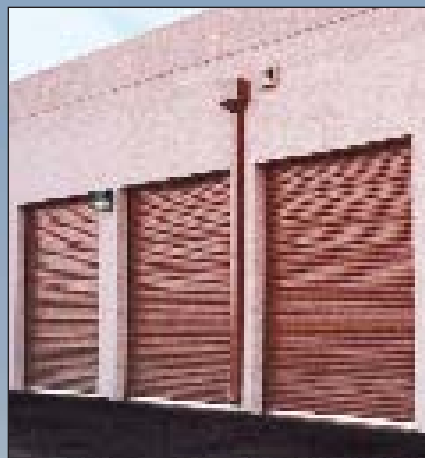

SERIES TMB 2000 Door Engagement Detail

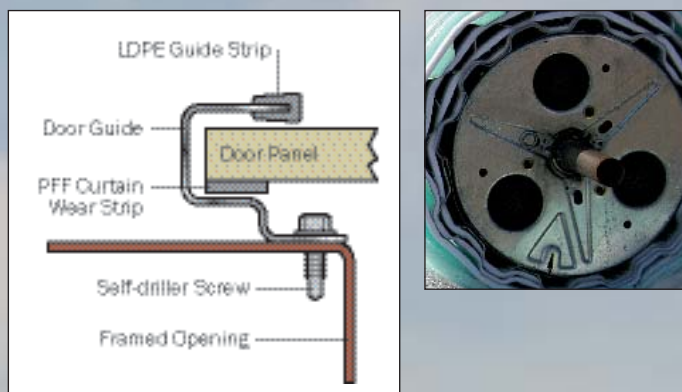

Series TMB 2500

GENERAL DESCRIPTION

- Designed for frequent usage requirements.
- Heavy duty applications for frequent usage including warehousing, freight terminal & industrial warehouse.
- Utilizes 12" drums
- Maximum size of 12' x 18'

SPECIFICATIONS

Curtain: 26 ga. Grade E steel, poly fiber filament wear strips, siliconized polyester paint over primer

Bottom Bar: 6063-T6 aluminum & 2" x 1-1/2" steel angle, bulb type astragal

Guides: 3" deep heavy duty 12 ga. Galvanized steel, polyethylene wear strips


Axle Assembly: 16 ga. Galvanized drums w/bearings, 1-5/16" O.D. tubing

Locks: 10 ga. steel slide bolt lock (1 pair)

Door Width	Door Opening Height Up To						
	Hand Operated			Reduced Drive Chain Hoist			
	8' 0"	9' 0"	10' 0"	12' 0"	14' 0"	16' 0"	18' 0"
8' 0"	\$690	\$730	\$770	\$920	\$1,015	\$1,130	\$1,250
9' 0"	\$730	\$770	\$815	\$975	\$1,050	\$1,180	\$1,340
10' 0"	\$745	\$790	\$850	\$1,020	\$1,120	\$1,350	\$1,410
12' 0"	\$850	\$885	\$955	\$1,080	\$1,205	\$1,510	\$1,565
14' 0"	\$880	\$960	\$1,040	\$1,180	\$1,280	\$1,650	\$1,720
16' 0"	\$940	\$1,030	\$1,130	\$1,250	\$1,365	\$1,820	\$1,985
18' 0"	\$1,095	\$1,205	\$1,320	\$1,540	\$1,770	\$2,115	\$2,260



SERIES TMB 2500 Door Engagement Detail

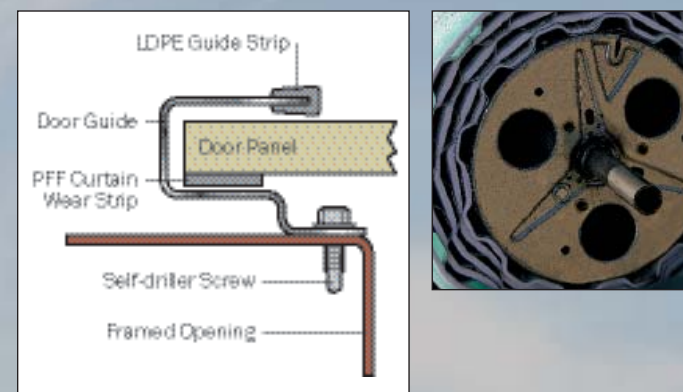

Series TMB 5000

GENERAL DESCRIPTION

- Designed for high wind usage requirements.
- Super duty applications for frequent usage.
- Deep engagement guides & wind-locks for better performance.
- Utilizes 12" drums
- Maximum size of 20' x 18'

SPECIFICATIONS

Curtain: 26 ga. Grade E steel, poly fiber filament wear strips, siliconized polyester paint over primer

Bottom Bar: 6063-T6 aluminum & 2" x 1-1/2" steel angle, bulb type astragal

Guides: H.D. 12 ga. Galvanized with windlock bar, polyethylene wear strips

Axle Assembly: 16 ga. Galvanized drums w/bearings, 1-5/16" O.D. tubing

Locks: 10 ga. steel slide bolt lock (1 pair)

Door Width	Door Opening Height Up To						
	4:1 Reduced Drive Chain Hoist				8:1 Reduced Drive Chain Hoist		
	8' 0"	9' 0"	10' 0"	12' 0"	14' 0"	16' 0"	18' 0"
8' 0"	\$960	\$1,020	\$1,070	\$1,180	\$1,310	\$1,395	\$1,485
9' 0"	1,015	\$1,055	\$1,130	\$1,260	\$1,380	\$1,485	\$1,605
10' 0"	\$1,050	\$1,110	\$1,170	\$1,300	\$1,430	\$1,535	\$1,650
12' 0"	\$1,110	\$1,175	\$1,240	\$1,380	\$1,525	\$1,760	\$1,800
14' 0"	\$1,190	\$1,265	\$1,350	\$1,485	\$1,660	\$1,880	\$1,900
16' 0"	\$1,290	\$1,370	\$1,445	\$1,625	\$1,810	\$1,950	\$2,090
**18' 0"	\$1,390	\$1,470	\$1,550	\$1,745	\$1,890	\$2,110	\$2,330
**20' 0"	\$1,565	\$1,665	\$1,770	\$1,960	\$2,190	\$2,360	\$2,525



Note: Florida approved wind rated to 140 mph.
** Indicates no certification available.

SERIES TMB 5000 Door Engagement Detail

